



SPECIFICATIONS

MEASUREMENTS	Metric	Imperial
A Max. Lifting Height	6.99m	22'11"
Max. Outreach	3.89m	12'9"
B Overall Length	5.20m	17'1"
C Overall Width	2.305m	7'7"
D Overall Height	2.53m	8'4"
E Wheelbase	2.85m	9'4"
Ground Clearance	0.385m	1'1"
PRODUCTIVITY		
Max. Capacity	4,200kg	9,240lbs
Gradeability-Unladen	27°	
Min. Turning Radius	3.41m	11'2"
Tilt Angle	±11°	
Drive /Steering Mode	4 Wheel Drive / 4 Wheel Steer	
Primary Boom Ascending Time	6.5s	
Primary Boom DescendingTime	7.2s	
Boom Extending Time	5.6s	
Boom Retracting Time	4.2s	
Forward - First Gear Travel Speed	8km/h	4.96mph
Forward - Second Gear Travel Speed	27km/h	16.74mph
Backward - First Gear Travel Speed	8km/h	4.96mph
Backward - Second Gear Travel Speed	27km/h	16.74mph
Service brake	Full Hydraulic Wet Braking	
Standard Tyres	460/70 R24	
ENGINE		
Manufacturer	Perkins	
Rated Power	74.4kw	99.77 hp
Max. Torque	450N.m	331.92 lb.ft
Displacement	3.9L	237.9 cu.in
Fuel Tank Capacity	145L	38.3 gal
Maximum traction force	80KN	
HYDRAULIC SYSTEM		
Working pump displacement	138.6L/min	31.5 US gpm
Hydraulic Oil Capacity	120L	31.7 gal
WEIGHT		
Machine Weight	8,500kg	18,700 lbs

TRANSPORTATION DIMENSION

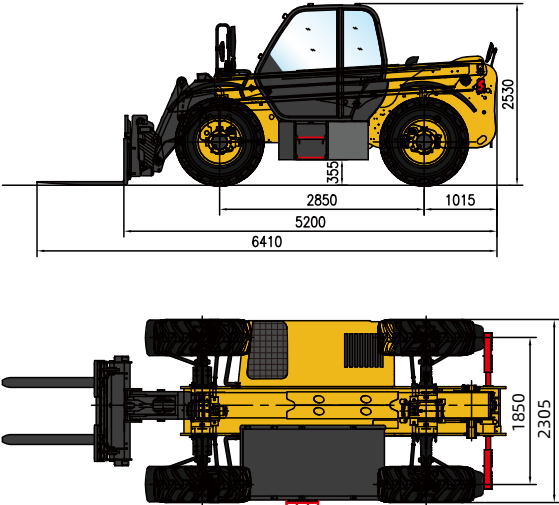

ROUGH TERRAIN LOAD CHART

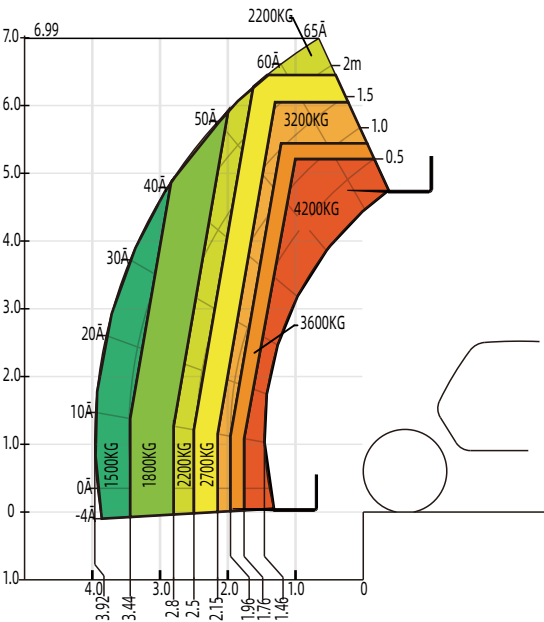

LONKING 龙工

Efficiency Rules the Future

LGT4207

TELEHANDLER



The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;